



UNIT:mm

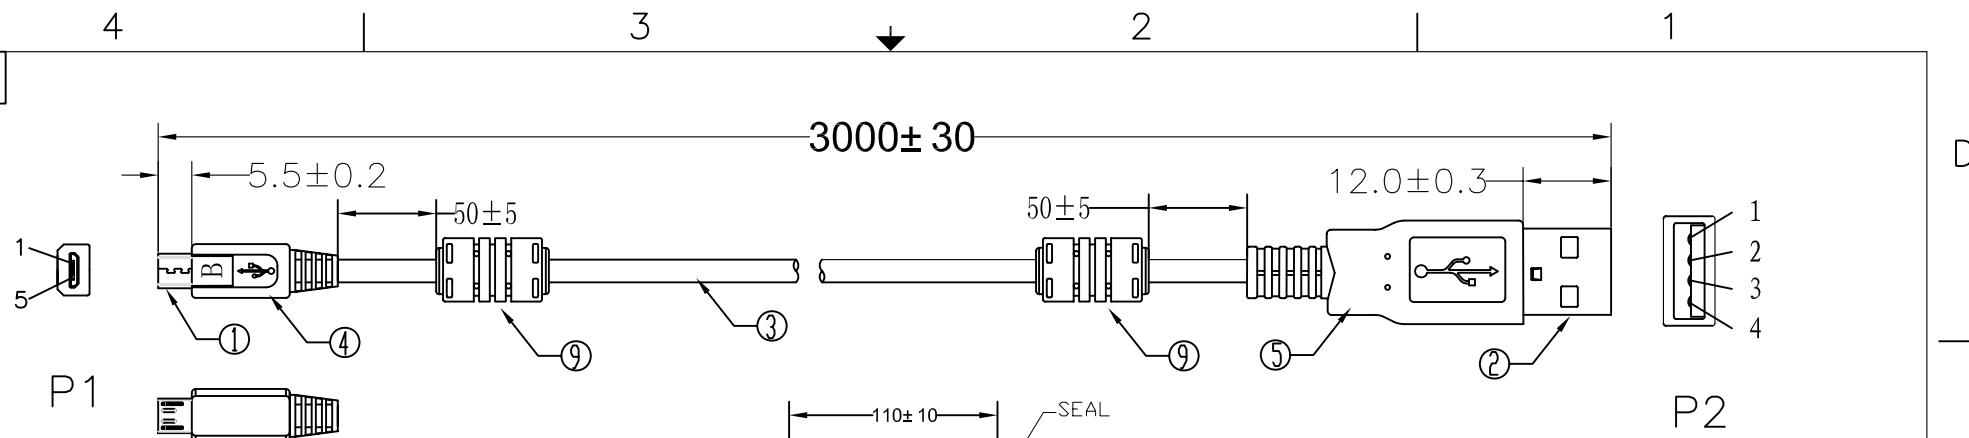

PIN ASSIGNMENT			
P1		P2	
1	RED	1	
2	WHITE	2	
3	GREEN	3	
5	BLACK	4	
SHELL	DRAIN+BRAID	SHELL	

**Electrical test:**  
 1.100% short,open,miswire test  
 2.Conduct resistance:2 Ohm(max)  
 3.Insulation resistance:10Mohm(min)  
 4.dielectric test:DC 300V

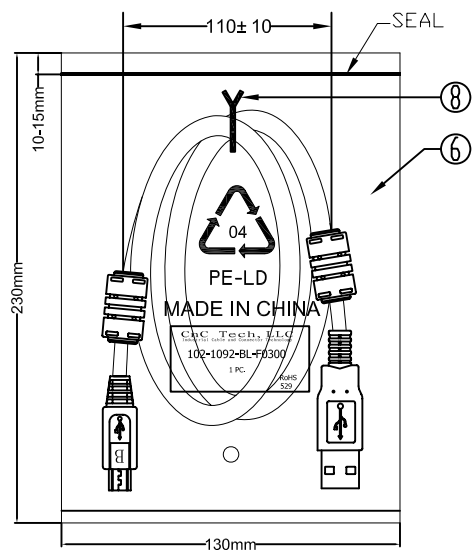

1PC/PE BAG

NO.	NAME	Q'TY	SPECIFICATION
⑨	OUT JACKET	14g	BLACK 40P PVC (MOLD NO:CH003)
	FERRITE	2	CORE OD12*5.6*L20 BLACK
⑧	TIE	1	BLACK L=60mm
⑦	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"及印生产周期,有透气孔.
⑥	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"及印生产周期,有透气孔.
⑤	OUT JACKET	6g	BLACK PVC-40P (MOULD NO:WM-40)
④	IN JACKET	0.5g	CLEAR LD-PE (MOULD NO:NM-86)
	OUT JACKET	3g	BLACK PVC-40P (MOULD NO:WM-116)
③	CABLE	1	USB2.0 UL2725 [28AWG(7/0.12TC+AL)*1P+28AWG(7/0.12TC)*2C]+AEB(48B TC) JACKET:BLACK OD:3.5mm L=490±5mm
②	CONN	1set	USB A MALE SHELL:NICKEL PIN:G/F 3PCS TYPE INSULATOR COLOR:WHITE
①	CONN	1	MICRO USB 5P B/M SOLDER TYPE SHELL:NICKEL PIN:G/F INSULATOR COLOR:BLACK

**CnC Tech, LLC**  
 Industrial Cable and Connector Technology

DRAWN BY	LYNDON	DRAWING NO	VG/LJQ-094-100-C
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	102-1092-BL-F0300
DECIDED BY		DATE	2016-09-28
VERSIONS/EDITED	A/0	PROJECTION	

D  
C  
B  
A

D  
C  
B  
A

4 | 3 | 2 | 1

4 | 3 | 2 | 1