


Datasheet revision 1.0

www.Proto-Advantage.com


TO-252 to DIP-6 SMT Adapter (2.285 mm pitch, 6.58 x 7.30 mm body)

| DIMENSIONS | | | | | | |
|------------|------|-------|------|--------|-------|------|
| REF. | mm | | | inches | | |
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| Α | | 1.825 | | | | |
| В | | 2.75 | | | | |
| С | | 1.50 | | | | |
| B2 | | 7.00 | | | | |
| C2 | | 6.00 | | | | |
| D | | 0.785 | | | | |
| Е | | 2.285 | | | | |
| F | | | | | 0.300 | |
| G | | | | | 0.100 | |
| Н | | | | | 0.025 | |

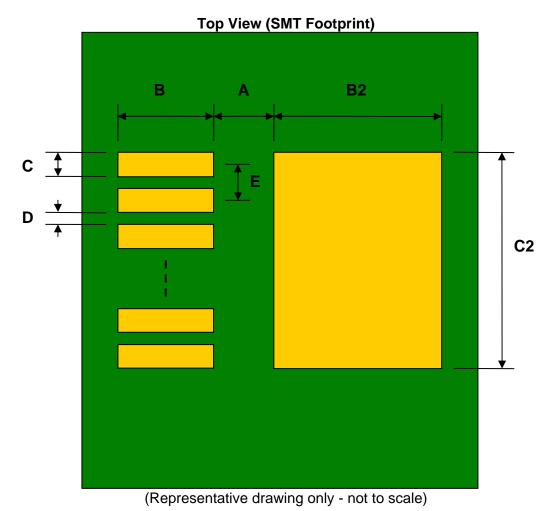




Bottom View (DIP Pins)

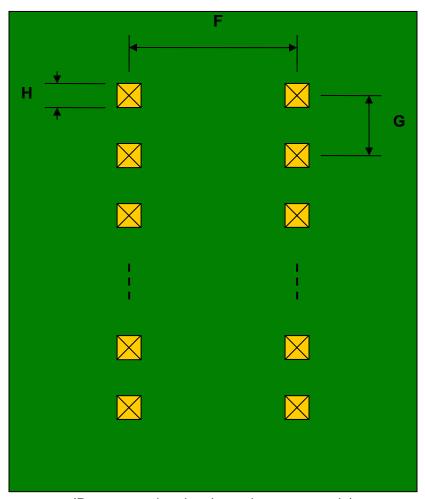

(Representative drawing only - not to scale)

Side View (DIP Pins)

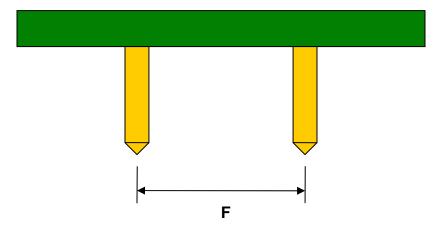

(Representative drawing only - not to scale)

